



Durable Outdoor Signs

Reflective • Versatile Attachment • Durable Product ID • Safety

Technical Data Sheet Part: #WFS- OS-0010

General Description

Durable Outdoor Signs

- Many materials to choose from
- Use industry standard symbols or submit your own
- Versatile attachment
- Outdoor durable for up to 30 years

Durable outdoor signs communicate your important information, identify potential hazards, and help prevent accidents season after season. Use industry standard symbols and headers, or submit your own symbols and messages for a custom solution. At your request, we will use pre-approved layouts, headers and graphics to conform with current ANSI/ NEMA guidelines.

Whatever your durable outdoor sign needs, William Frick & Company can help you configure the best solution with the right message, graphics and materials. We've even got multipurpose brackets and steel posts. Find the right material below.

Material	Polyethylene	Aluminum	Polycarbonate	Fiberglass	Steel/ Porcelain	Co-Extruded Poly
Outdoor Life	5– 10+ years	10+ years	15– 20 years	20+ years	25– 30+ years	30+ years
Vandal Resistance	No	No	Yes	Yes	Yes	Yes
Features	Excellent for indoor applications	Reflective or non-reflective finishes	Embedded graphics/ graffiti resistant	Embedded graphics– low maintenance	Excellent outdoor durability	Permanent engraved text
Thickness	0.035"– 0.125"	0.025"– 0.080"	0.090"	0.90"– 0.125"	0.044"– 0.070"	0.080"
Lead Time	3– 4 weeks	3– 4 weeks	3– 4 weeks	2– 3 weeks	6– 8 weeks	3– 4 weeks
Service Temp	200°F	250°F	200°F	250°F	250°F	200°F

**Temporary signs of disposable plastic or card stock with magnetic backings are also available in any thickness*

Applications

Safety & Compliance, Utility Labeling, Property management, Outdoor Use, Construction, Overhead & Above Ground Marking, Ground Level Marking, Utility Markers and Signs

Material Description

Various Material Constructions Available

Please see above chart

Test product for system compatibility as individual application conditions can impact results. William Frick Co. does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or any final product into which the product(s) may be incorporated by the purchaser and/ or user. The purchaser and/ or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.



Adhesive


Various Attachment Methods

Durable Outdoor Signs can be mounted using brackets, steel posts, U- Channels and more. Contact us for more information.

Shelf life

Stored at 70°F / 50% Relative Humidity

Completely stable

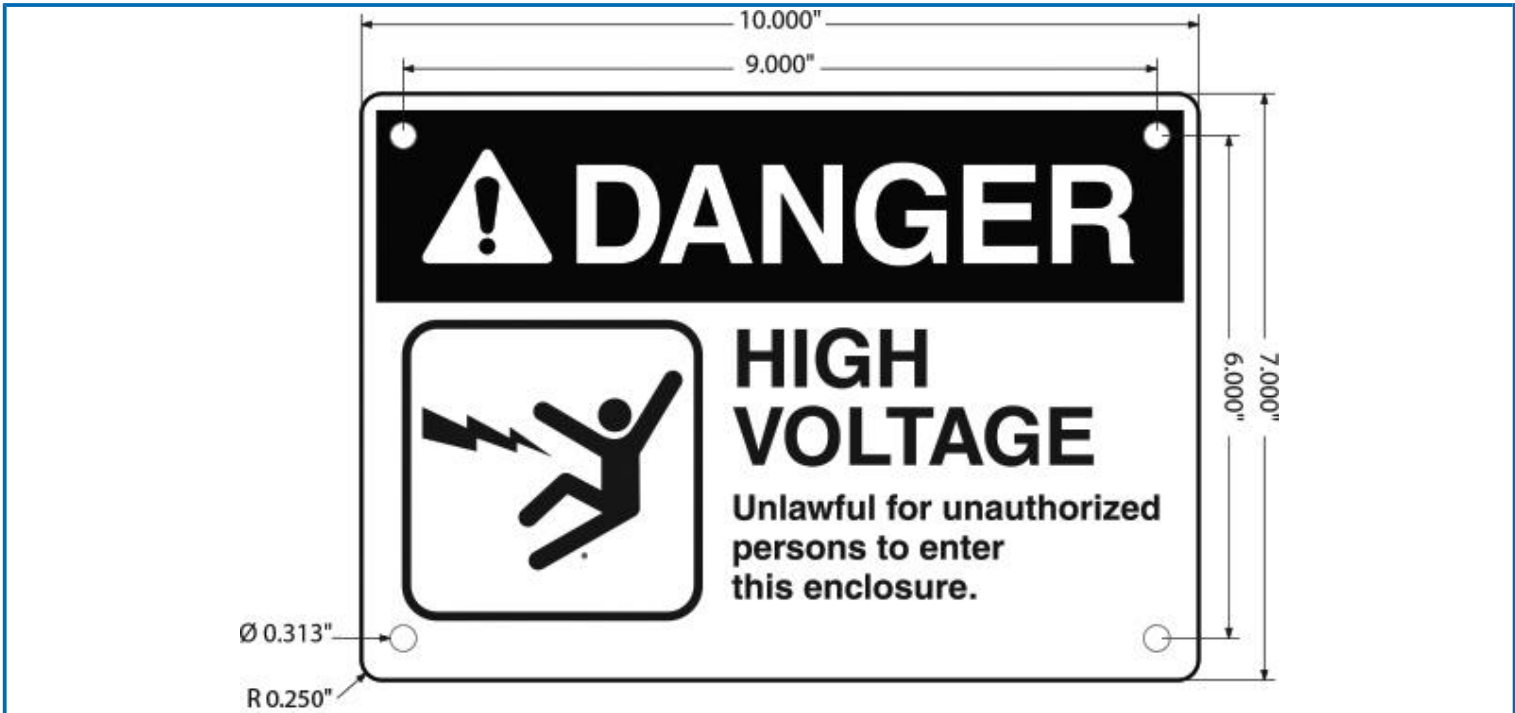

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES 3 PLACE DECIMAL + OR-.005" 2 PLACE DECIMAL + OR-.02" 1 PLACE DECIMAL + OR-.1" MAX SURFACE ROUGHNESS ALL MACHINED SURFACES EXCEPT AS NOTIFIED BREAK SHARP EDGES AND CORNERS .010" MAX	Contact No.	William Frick & Co.			www.fricknet.com
	DWG.	Durable Outdoor Signs			
	Engr.				
	Chk.				
	Aprvd.	Size.	DWG No. WFS- OS-0010	Rev.	

