



RFID ID Badges / Proximity Cards

- Variable memory sizes based on inlay type
- Read distance 2.5 inches to 20 feet depending on model
- On-site or off-site printing
- Slots or holes are available for easy attachment

Description



SMART MARK
DURABLE RFID TAGS & LABELS™

Radio Frequency Identification (RFID) tag technology can be used not only to identify and track objects but people as well. This proximity card/ID badge is made of sturdy PVC and works seamlessly with standard UHF Gen 2 systems. It can be used to identify employees, contractors, vendors and others in government buildings, military bases, hospitals, banks, credit card companies, insurance companies in fact all businesses and institutions that work with sensitive information or significant sums of money. Proximity cards may also be a suitable choice when selecting ID cards for students and school employees.

Proximity Card

Embedded in each card is an RFID tag. A proximity card reader positioned between 2.5 inches and 20 feet (depending on the model chosen) receives a signal from the tag and grants or denies access accordingly. Like contactless smart cards, proximity cards can have new information written onto them.

Many organizations restrict entry to corporate facilities and assets. Proximity cards provide ID card security while allowing fast, secure access.



Custom RFID ID Cards

The SM-ID badge can be custom printed. Our RFID cards work with a variety of printer systems and ID software packages. We can also pre-encode and pre-print your ID cards and ship to your offices. Today’s ID printers work digitally, offering a host of benefits over their predecessors, such as improved appearance.

ID card systems incorporate easy-to-use software with clean templates and fully-customizable options. Drag and drop digital employee photos and company logos onto assorted backgrounds to create your desired look. Add text such as safety messages. Choose a color scheme and template, or do a completely custom creation. Frick can provide the ID card software package that works best for your needs.

Sizes:

Type	Length	Width
CR-80 CR80	3.4"	2.1"
CR100 CR-100	3.9"	2.6"
ID-1	3.4"	2.1"

Additional information



Model Number	WF-SM-ID RFID ID Badge
Applications	Identification Labeling
Size	3.4" x 2.1" x 0.041"
Water Resistance	Excellent
Solvents Resistance	Good
Abrasion Resistance	Fair
Impact Resistance	Good
Shelf Life	Completely Stable, Stored at 70F and 50% Relative Humidity

RFID Performance

RFID Protocol	UHF EPC Class 1 Gen 2; ISO 18000-6C
Tag Type	Passive Read/Write
Frequency Range	860 – 960 MHz (Global)
EPC Memory	96 bits
IC	Impinj Monza 3


*Other single record and dual record chips available.

Tested Polarization:

Tag performance was experimentally measured in an anechoic chamber with a known set of experimental variables. The antenna used for measurements was linearly polarized and of monostatic configuration. The direction of tested polarization is as follows.



Optimal Read Range* on Different Material Surfaces:

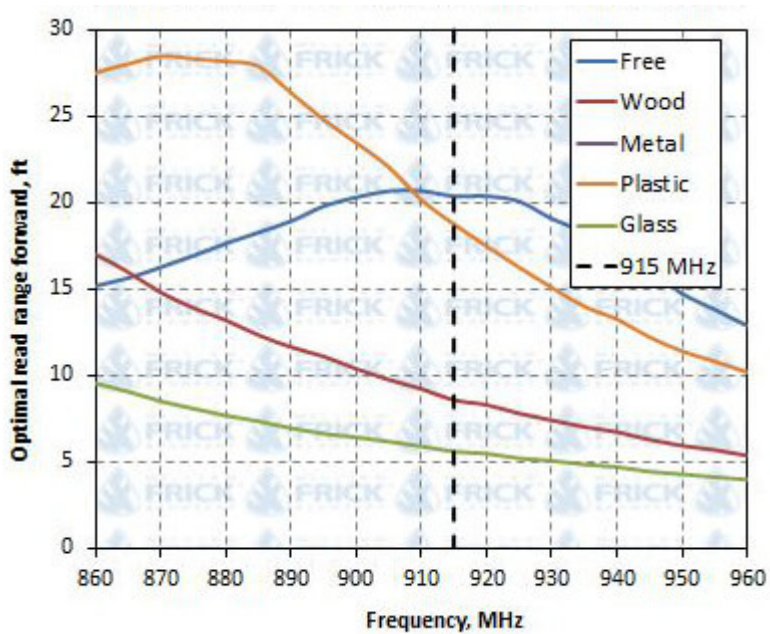

*Tag performance was measured free of material influence. Actual read ranges may differ depending on conditions such as environment, tag placements, hardware, etc.