



## Tamper Evident VOID Labels

- Easy-to-install, UL-recognized and barcode ready
- Leaves “VOID” message when removed
- Durable for harsh environments
- RFID available

### Description



Our tamper evident products destruct when removal is attempted. If the adhesive layer is fractured, the word VOID appears on the applied surface, indicating tampering. Their durable polyester material withstands harsh environments and bonds well to a variety of surfaces including stainless steel, ABS, polypropylene, painted metal, polyester, HDPE, nylon, glass, and polycarbonates. Maximize your security with RFID – ideal for food and beverage establishments.

### Additional information



Model Number	WFC-AC-VOID Tamper Evident Labels
Applications	Tamper Evident Seals, Product Marking
Material	Destructible Polyester Film
Overall Thickness	2.3 mil
Expected Outdoor Life	1 - 2 years
Temperature Service Range	-40°F to 208°F
Minimum Application Temperature	32°F
Water Resistance	Excellent
Solvents Resistance	Very Good
Abrasion Resistance	Excellent
UV Resistance	Good
Oil Resistance	Very Good
Adhesive	#300 High Strength Acrylic
Adhesion	Adhesion to HSE Plastics: Excellent, Adhesion to LSE Plastics: Excellent, Adhesion to Glass at 72 hr. dwell: Excellent, Adhesion to Steel at 72 hr. dwell: Excellent


## RFID Performance

RFID Protocol	UHF EPC Class 1 Gen 2; ISO 18000-6C
Tag Type	Passive Read/Write
Frequency Range	860 - 960 MHz (Global)


\*Other single record and dual record chips available.

## Tested Polarization:

Tag performance was experimentally measured in an anechoic chamber with a known set of experimental variables. The antenna used for measurements was linearly polarized and of monostatic configuration. The direction of tested polarization is as follows.

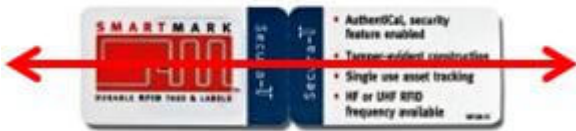

## Optimal Read Range\* on Different Material Surfaces:

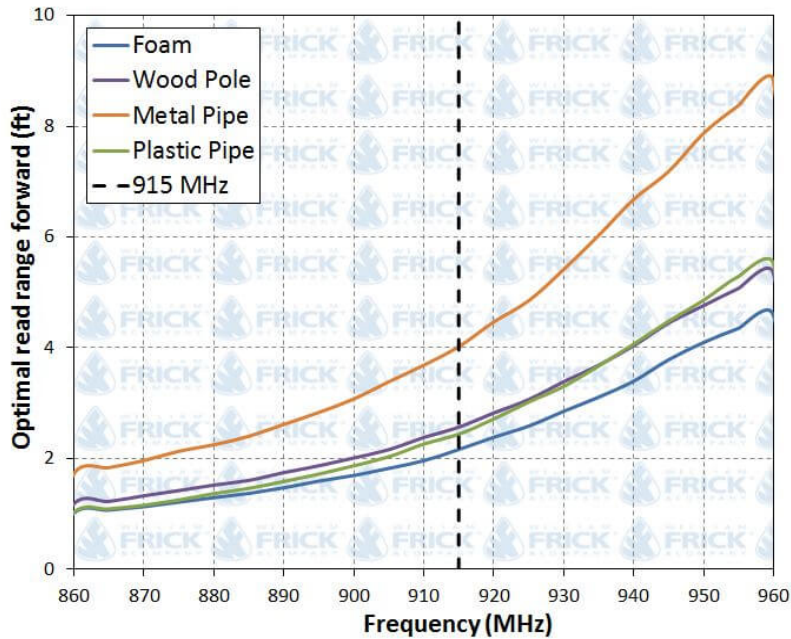

\*Tag performance was measured free of material influence. Actual read ranges may differ depending on conditions such as environment, tag placements, hardware, etc.